ornelius.)



CNM1448 SERIES

FEATURES



All air-cooled models allow for top or side hot-air discharge for increased installation flexibility



Environmentally Responsible

- Exceeds 2018 Department of Energy regulations
- Up to 20% more efficient than previous Nordic models •



Sanitation

- Automated cleaning cycle
- Dishwasher safe, food zone components
- Easy to clean, structural foam base is rust free



Components

- Easy-access, forward facing evaporators on all models
- Less inventory required for service providers
- Quicker response times

1000	-120325-2007			
	120322000			
	LANNERSON 1			
1.	1.5936663.10			
	172501000000	State and a strength		
	(GERMAN)	a second to the second s		
	S. Markater Street			
	Contraction of			
1000	DOWNSTON OF	A State of the second		
	and the second second			
	CONTRACTOR .			
	CARE CONTRACTOR			
	Ball and the second states of	and the second second second		
				and the second

Cornelia

APPLICATIONS



Restaurant Lodging Packaged Ice

SPECIFICATIONS

Daily Ice Production ^[1]
per 24hrs

ICF

		•							
Model Number	Condenser Type	70°F Air / 50°F Water	90°F Air / 70°F Water	Electrical (V/Hz/Ph)	Energy ^[#] Usage	Min Circuit	Fuse Size	Water Usage Potable ^[2]	Shipping Weight
	A :	1560 lbs	1210 lbs	208-230/		26.1	30.0	14.4	310 lbs
CNM1448A*6A	Air	708 kg	549 kg	60/1	4.4 kWH	Amps	amps	14.4 gal	141 kg
CNM1448W*6A	3W*6A Water	1560 lbs	1440 lbs	208-230/	3.72 kWH	18.9	30.0	14.7 gal	300 lbs
CINIVI1446W OA	vvalei	708 kg	653 kg	60/1	5.72 KVVП	Amps	amps	14.7 gai	136 kg


* Replace * with "F" for full cube and "H" for half cube

Daily production assumes half cube models. [1]


Water usage in gallons per 100 lbs of ice produced at 90°F Air / 70°F Water. [2]

[#] kWH Used per 100 lbs of ice produced at 90°F Air / 70°F Water.

SCHEMATICS

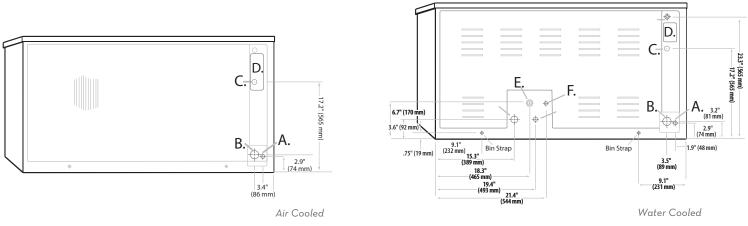

A. Ice maker potable water in	3/8" FPT.
B. Ice maker water out	3/4" FPT.
C. Hole for electrical connections	7/8"
D. Electrical connection junction box	7/8"
E. Condenser water in (water cooled unit)	3/8" FPT.
F. Condenser water out (water cooled unit)	1/2" FPT.



OPERATING REQUIREMENTS

	Min	Max 60Hz	Max 50Hz	
Ampiont Air Tomonorotura	50°F	100°F	110°F	
Ambient Air Temperature	10°C	38°C	43°C	
Water Temperature	40°F	100°F	110°F	
	4.4°C	38°C	43°C	
Water Pressure	20 psig	60 psig (4.1bar)		
Water ressure	1.4 bar	00 p3ig	(4.1001)	

CROSS REFERENCE TO PRIOR MODELS

Legacy Nordic Model	Equivalent Nordic Elite Model
CCM1448AF22	CNM1448AF6A
CCM1448WF23	CNM1448WF6A

WARRANTY

- 3 years parts & limited labor
- 5 years compressor & evaporator parts
- See website for warranty details



© 2018 CORNELIUS CG5090-1218

ADDITIONAL SPECS

Full Cube	Half Cube	OTHER ACCESSORIES	
(W x D x H)	(W x D x H)	Bin Model	Adapter Kit
.88 x .88 x .88 in	.38 x .88 x .88 in	B530AP	Not Required
2.2 x 2.2 x 2.2 cm	1.0 x 2.2 x 2.2 cm		
		Hotel Dispenser	Adapter Kit
	18	CHD30P1	Not Required

Power cord wires	3 including ground				
Refrigerant	R404a				
Listings	cULus	NSF	CE		
	Agion: Nature's antimicrobial	\mathbf{O}	BPA Free		

IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A Ph: 763.488.8200 Email: webmaster@cornelius.com

101 Broadway Street West Osseo, MN 55369 www.cornelius.com

For more information or to place an order, contact your sales representative or authorized distributor.