

NORDIC CCM0430 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B430AP bin

FEATURES



Nature's antimicrobial

High-yield - Produces up to 529 lbs. (240 Kgs.) of ice/day

Durable – Constructed from corrosion-resistant stainless steel

Antimicrobial - Built-in Agion Antimicrobial product protection effective against mold, mildew, and fungus

Small footprint – Ultra low-profile - only 20" (508 mm) tall

Smart - Harvest assist reduces utility consumption

Customizable - Choice of full or half cube size


Easy to maintain - No air filter to clean or replace


OPERATING LIMITS

Ambient Temp. Range Air & Water	50° - 110°F (10° - 43°C)		
Water Temp. Range	40° - 100°F (4.5° - 38°C)		
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)		
Water Fressure Ice Maker Water III	Max. 60 psi (4.1 bar)		
Condenser Inlet Water	Min. 20 psi (1.4 bar)		
(Water cooled only)	Max. 60 psi (4.1 bar)		

AR 'IN' CONDENSER SIDE (6.00 MINIMUM WALL CLEARANCE REQUIRED FOR PROPER OPERATION) HARDWARE FOR STRAP MOUNTING TO BIN REAR VIEW


Dimensions and Air Flow



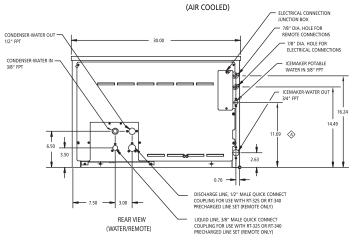

		1		ı		1	1	ı		1
		Ice Prod.	Ice Prod.	Water Used-Gals.		Kilowatts				
		per 24	per 24	(Ltrs.) per 100 lbs. of		Used per				
		hrs. at	hrs. at	ice 90° Air / 70° Water		100 lbs.				
		70° Air /	90° Air /			of ice 90°	Heat		Min.	
	Cond.	50° Water	70° Water	Ice Prod.	Cond.	Air / 70°	Rejection	Electrical	Circuit	Fuse
MODEL NO.	Unit	lbs. (Kgs.)	lbs. (Kgs.)	Use	Use	Water	(Btuh)	Rating	Amp.	Size
CCM0430AH1	Air	505 (230)	368 (167)	28.6	n/a	6.1	7835	115/60/1	17.1	20

^{*} Represents cube size. For full cube substitute an "F", for half cube substitute an "H". Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



Cube Size:	Width	Depth	Heigth
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

TECHNICAL SPECIFICATIONS

AGENCY LISTINGS.......



IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A.
Ph: 763.488.8200
Email: webmaster@cornelius.com

101 Broadway Street West Osseo, MN 55369 www.cornelius.com

© 2016 CORNELIUS CG5058-0516

^{1. 90°/70°} figures are rated in accordance with ARI Standard 810.