



NORDIC CCM1030 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B842SS bin


Protected by Agion



FEATURES

- High-yield** – Produces up to 1077 lbs. (490 Kgs.) of ice/day
- Durable** – Constructed from corrosion-resistant stainless steel
- Antimicrobial** – Built-in Agion Antimicrobial product protection effective against mold, mildew, and fungus
- Small footprint** – Ultra low-profile - only 26" (660 mm) tall
- Smart** – Harvest assist reduces utility consumption
- Customizable** – Choice of full or half cube size
- Easy to maintain** – No air filter to clean or replace

Dimensions and Air Flow

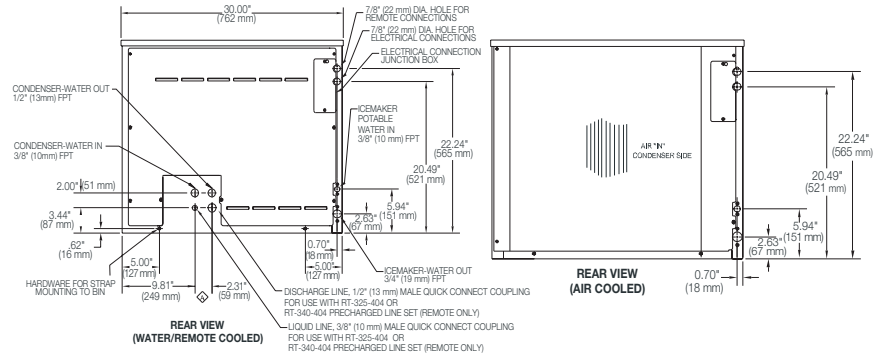

OPERATING LIMITS

Ambient Temp. Range Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 110°F (4.5° - 43°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (4.1 bar)


MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
CCM1030A*21	Air	1071 (487)	803 (365)	21.3	n/a	5.7	16558	208-230/60/1	13.8
CCM1030RH22	Remote	1077 (490)	921 (419)	21.8	n/a	5.4	18377	208-230/60/1	13.8
CCM1030A*51	Air	1044 (475)	790 (359)	20.8	n/a	5.5	15877	230/60/1	12.6

MODEL NO.	Description	Shipping Weight lbs. (Kgs.)
RC08002	Remote Condenser for 1 model CCM1030R (208-230/50-60/1 voltage)	95 (43)
RT25	25 ft. (7.6m) Precharged Tubing Kit for R-404A models	13 (6)
RT40	40 ft. (12m) Precharged Tubing Kit for R-404A models	18 (8)
RT60	60 ft. (18.2m) Precharged Tubing Kit for R-404A models	26 (12)

See Bin specification sheet for information on ice storage bins.
 * Represents cube size. For full cube substitute an "F", for half cube substitute an "H".
 Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

TECHNICAL SPECIFICATIONS

NUMBER OF WIRES 3
 MAX. FUSE SIZE 50 Hz: 16
 60 Hz: 20
 SHIPPING WEIGHT LBS (KGS.) . . 225 (102) - 230 (107)
 AGENCY LISTINGS NSF c UL US LISTED



Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

