



QUEST ELITE 2000

2-FLAVOR POST-MIX DISPENSER

Also Included!




Multi-Panel Merchandiser Option:

721402101JU2

Unit Includes iced tea, lemonade, cold brew and a variety of latte graphics!



Also Included!



Single-Panel Merchandiser Option:

721402101JU1

Unit Includes both juice and coffee graphics!



FEATURES

Wide product/ratio capability – Handles a wide range of post-mix products including juices with pulp, teas and cold coffees

Frost-free refrigeration compartment – Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

Large 6-8lb ice bank – Provides cold drinks during peak demand

Patented mixing system – Delivers consistent quality drinks with no stratification, slugging or dripping


LED illuminated graphics – Eliminates lost sales due to 'lights out' and reduces life costs

Narrow footprint – Conserves counter space

Easy to service – Modular component design and ease of access speeds service

'Sold out' indication – Alerts operator to product out condition and maximizes sales

Flexible Merchandiser - Option of single-panel or multi-panel merchandiser

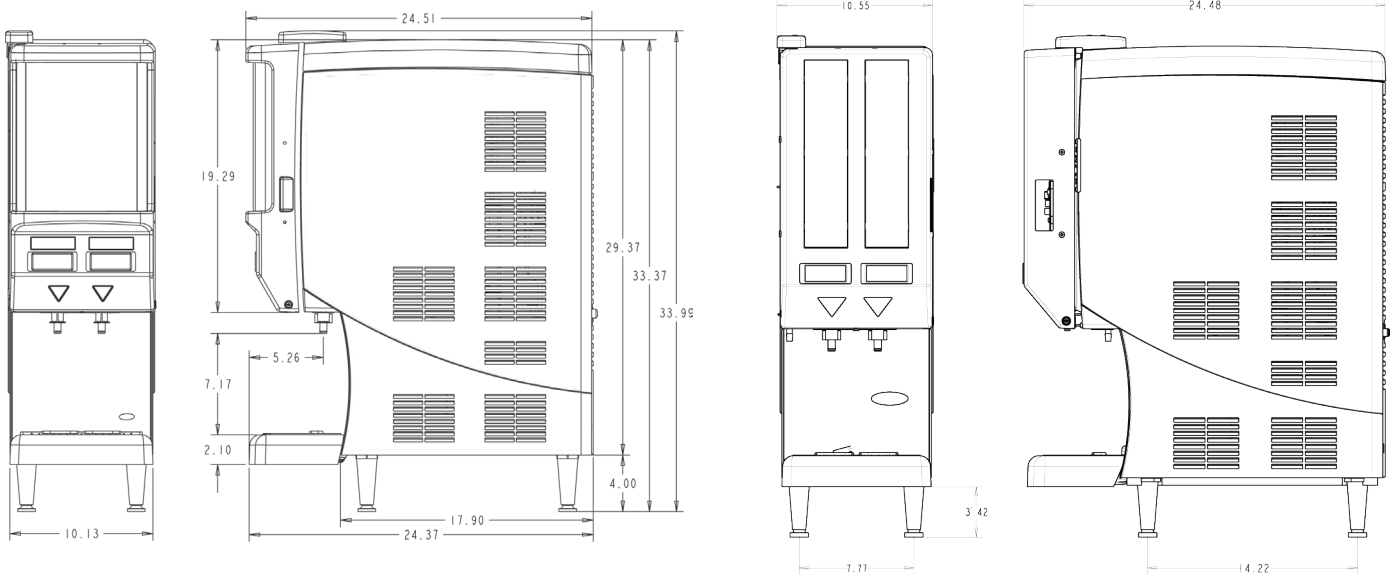

PART NUMBER	DESCRIPTION
721412201JU1	Quest Elite 2 flavor, illuminated, flush, push button 230/50, single panel merch
721412211JU1	Quest Elite 2 flavor, illuminated, flush, portion control 230/50, single panel merch
721402101JU2	Quest Elite 2 flavor, illuminated, non-flush, push button 115/60, multi-panel merch.
721402101JU1	Quest Elite 2 flavor, illuminated, non-flush, push button 115/60, single panel merch.
729011004	Extended Splash Panel Kit for Pitchers/Carafes
720401107	Refillable Concentrate Reservoir 3.5 L
729011153	Cup Locator
729011126	Bag-In-Box Option Kit
729011183	Extender Nozzle Kit
729011218	Portion Control Kit - 2 Flavor

TECHNICAL SPECIFICATIONS

ELECTRICAL	115 volts, 60 Hz 230 volts, 50 Hz	CONCENTRATE STORAGE	2 - 3.5 L bottles
REFRIGERATION	Hermetically sealed system, R-134a refrigerant 5 oz (142 g)	WATER SUPPLY REQUIREMENTS	
ICE BANK	6-8lb	OPTIMUM SUPPLY SPECIFICATION . .	50psi (3.4 bar) flowing 3oz/sec
CABINETY	High impact plastic cabinetry with stainless steel front panel	MAXIMUM STATIC PRESSURE . .	60psi (4.1 bar)
DISPENSER DIMENSIONS	29.3"H x 15"W x 24.3"D (74.4 cm x 37.5 cm x 61.7 cm)	MINIMUM STATIC PRESSURE . . .	30psi (2.1 bar)
WEIGHT	Dry: 120 lb (54.4 kg) Operating: 185 lb (83.9 kg)	For water pressure exceeding the optimum supply specification, flow control set at 50psi is recommended	
RECOMMENDED CLEARANCE . .	Back: 4" (10.16 cm) Top: 12" (34.8 cm) Sides: 1" (2.54 cm)	COOLING	Four 5 oz drinks/min (148 mL) @ 75°F (24°C) ambient, 75°F (24°C) incoming water, and 41°F (4°C) concentrate w/o exceeding a 40°F (4°C)
WATER CONNECTION	0.375" (0.95 cm) SAE male flare SAE fitting on dispenser	FLOW RATE	Adjustable water flow rate from 1-2.2 oz/sec
		AGENCY LISTINGS	