

UF-1 AND UFB-1 VALVES TRAINING MANUAL



CARBON DIOXIDE
WATER
SYRUP/CONCENTRATE
MECHANICAL
REFRIGERATION
CONTROLS & ELECTRICAL

Release Date: June 28, 2023

Publication Number: 315222001OPR

Revision Date: June 28, 2023

Revision: A



Visit the Cornelius web site at www.cornelius.com for all your Literature needs.

Notice

The products, technical information, and instructions contained in this manual are subject to change without notice. These instructions are not intended to cover all details or variations of the equipment, nor to provide for every possible contingency in the installation, operation or maintenance of this equipment. This manual assumes that the person(s) working on the equipment have been trained and are skilled in working with electrical, plumbing, pneumatic, and mechanical equipment. It is assumed that appropriate safety precautions are taken and that all local safety and construction requirements are being met, in addition to the information contained in this manual.

This Product is warranted only as provided in Cornelius' Commercial Warranty applicable to this Product and is subject to all of the restrictions and limitations contained in the Commercial Warranty.

Cornelius will not be responsible for any repair, replacement or other service required by or loss or damage resulting from any of the following occurrences, including but not limited to, (1) other than normal and proper use and normal service conditions with respect to the Product, (2) improper voltage, (3) inadequate wiring, (4) abuse, (5) accident, (6) alteration, (7) misuse, (8) neglect, (9) unauthorized repair or the failure to utilize suitably qualified and trained persons to perform service and/or repair of the Product, (10) improper cleaning, (11) failure to follow installation, operating, cleaning or maintenance instructions, (12) use of "non-authorized" parts (i.e., parts that are not 100% compatible with the Product) which use voids the entire warranty, (13) Product parts in contact with water or the product dispensed which are adversely impacted by changes in liquid scale or chemical composition.

Correct Disposal of this Product



RECYCLE

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Trademarks and Copyrights

This document contains proprietary information and it may not be reproduced in any way without permission from Marmon FoodService Technologies Inc. This document contains the original instructions for the unit described.

MARMON FOODSERVICE TECHNOLOGIES INC
355 Kehoe Blvd
Carol Stream, IL
Tel: + 1 800-238-3600
Printed in U.S.

Contact Information

To inquire about current revisions of any documentation or assistance with any Cornelius product, contact:

www.marmonfoodservice.com
www.cornelius.com
800-238-3600

TABLE OF CONTENTS

INTRODUCTION	1
Preview Questions	1
Key Things To Know / Do	1
Overview	2
Product Description	2
Dimensions & Capacities	4
SYSTEM DETAILS	5
Water	5
Water Quality	5
Water Flow	5
Adjusting Flow Rates	6
Calculating Flow Rates	7
Syrup/Concentrate	8
Setting Ratios	8
Mechanical	9
UF-1 Valve Disassembly	9
Mounting Block Disassembly	12
Controls and Electrical	13
UF-1 Portion Control Valve	13
Portion Control Valve Programming	13
UF-1 Optifill™ Valve	14
Optifill™ Valve Programming	14
INSTALLATION	16
Installation Requirements	16
Requirements Summary	16
Electrical Requirements	16
Installation & Start-up	16
UF-1 Valve Installation Procedure	16
Installation Checklist	17
Retrofitting	17
Mounting Block Removal	17
SERVICE	18
Preventative Maintenance	18
Preventative Maintenance Procedures	18
Cleaning Valve	18
TROUBLESHOOTING	19
ATTACHMENTSE	23
REVIEW	24



INTRODUCTION

1. PREVIEW QUESTIONS

Check your current knowledge by taking a few minutes to answer the following questions:

1. What are the flow capacities of a UF-1 valve? _____

2. What are the flow capacities of a UFB-1 valve? _____

3. Which syrup has the greatest pressure drop, diet or sugar? _____

4. How do juice valves differ from carbonated beverage valves? _____

5. Can you program “top-off” on a portion control valve? _____

6. What components must be replaced when retrofitting SF-1 to UF-1 valves? _____

2. KEY THINGS TO KNOW / DO

- For quality drinks — keep the nozzles and the water/syrup system clean; and have the correct ratio, temperature, and carbonation!
- Set the water/syrup ratio accurately — and leave it alone!
- To set the ratio accurately, set the water flow first, then the syrup!
- Be sure to cool below 40°F the syrup and water before setting the ratio.



3. OVERVIEW

3.1 Product Description

The UF-1 and UFB-1 valve provides accurate flow capability and dependability. The UF-1 and UFB-1 valves are capable of flow rates of 1 ½ to 3 ounces per second (high flow), 2 to 4 ounces per second (UFB-1), or 3 to 4 ½ ounces per second (ultra flow). The valve flow control modules are the only parts that differ in the three versions.

Note: The flow rate is also dependent on the capacity of the dispensing, cooling, and carbonation systems. An ultra flow capacity valve will not make up for a slow system flow rate or inadequate supplies of cooled water and syrup. The following is a list of Cornelius units and the valve flow rates they support:

Fast Flow 1.5 to 3.0 oz./sec.	Fast Flow, UFB-1, or Ultra Flow 2 to 4 oz./sec. or 3.0 to 4.5 oz./sec.
Vanguard	Vanguard 245
Value Line 2323 (10 circuit cold plate)	Premium 2323 (12 circuit cold plate)
Venture	2230
Vantage	3030
1522	ED 150
1722	ED 200
2224	ED 250
2230-100	ED 300
DB 90	DF 150
DB 150	DF 200
DB 200	DF 250
DB 250	
DB 275	
TJ 45	
TJ 90	
TJ 150	
TJ 200	
TJ 250	
TJ 300	
TJ 400	

3. OVERVIEW

3.1 Product Description (cont.)

There are four varieties of UF-1 and UFB-1 valves:

- The cup activated valve dispenses by means of a lever engaged by the cup.
- A push button valve has a press and hold button on the front cover of the valve.
- The Optifill™ valve dispenses with an activation lever but stops after liquid fills the cup and touches the lever.
- A portion control valve has four programmable drink size buttons that provide timed deliveries, top off, and a manual dispensing button.

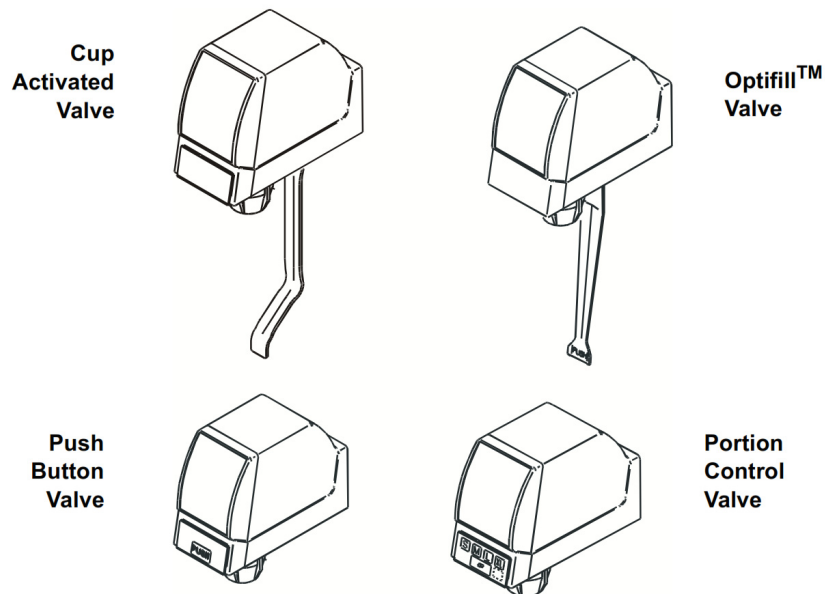


Figure 1

The UF-1 and UFB-1 valves are the same as described above with minor differences for juice applications. In the UF-1 and UFB-1 valve concentrate enters the nozzle assembly higher providing a better mix of concentrate and water in the cup. In addition, the orifices for concentrate are larger to avoid clogging. The concentrate diffuser is gray allowing for easy identification.

Note: The beverage (syrup) diffuser must be installed to use a diversion tube to ratio the concentrate valve

Note: Concentrate valves have only one hole in their sleeve and are only offered in fast flow capacities of 1.5 to 3.0 oz./sec.

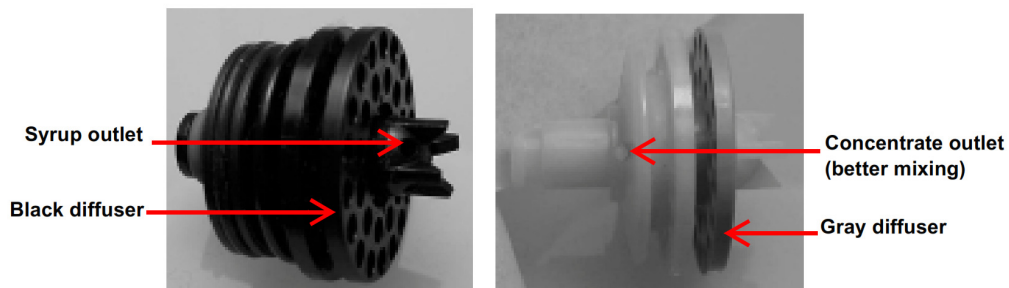


Figure 2

3. OVERVIEW

3.1 Product Description (cont.)



Figure 3

A side water lever kit can be added to a valve allowing for dispensing of water without syrup or concentrate. The side water lever can be added to either a carbonated drink valve or a non-carbonated drink valve.

Post-mix valves control:

- the ON–OFF of syrup and water,
- the flow rates of syrup and water,
- the mixing of the two ingredients as they pour into the cup, and
- in some instances - dispensed portion.

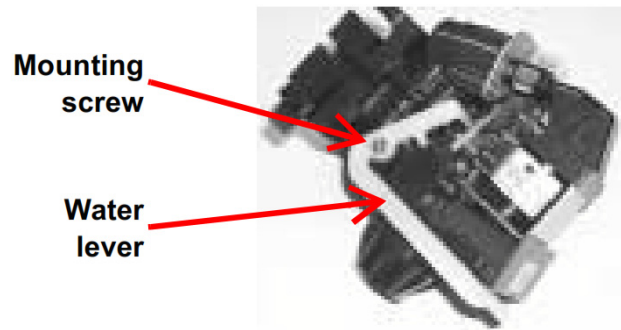


Figure 4

3.2 Dimensions & Capacities

Fast Flow: 1 ½ to 3 oz./sec.

UFB-1: 2 to 4 oz./sec.

Ultra Flow: 3 to 4 ½ oz./sec.

Operational temperature range: 10°C (50°F) to 43°C (110° F)

Voltage requirements: 22 to 27 VAC (50/60 Hz)

Transformer (electronic valves): 80 VA min.

Operating Pressure (flowing): syrup = 20 psi min; water = 35 psi min.

Concentrates and juices that contain particulates must be dispensed from a juice valve.

A slanted drip tray is necessary when using an Optifill™ valve.

SYSTEM DETAILS

1. WATER

1.1 Water Quality

Water quality issues have an affect on dispensing valves. Chloramine, a combination of chlorine and ammonia is responsible for some degradation of rubber components. Chloramine is used in many U. S. water supplies. Its affects can be minimized by installing and maintaining a water filtration system.

Ultra pure water affects the sensitivity of the Optifill™ valve. Because ultra pure water has less mineral content, it reduces the conductivity of the water keeping the circuit open and overflowing the beverage container.

1.2 Water Flow

The size of the orifice in the piston varies depending on whether the piston is used for syrup or water, and whether it is high flow or ultra flow valve.

Note: The notched water piston on the Ultra Flow and UFB-1 valve. results in at least one orifice in the sleeve always open. This eliminates pulsating and smooths water flow at higher flow rates.



Figure 5

In operation the liquid flows through the knife-edged orifice in the bottom of the piston and then out the orifices in the sleeve. The outlet orifice size in the sleeve is regulated by the position of the piston. In the illustration, the piston is restricting approximately 1/2 of the outlet orifices.



Figure 6

1.2 Water Flow (cont.)

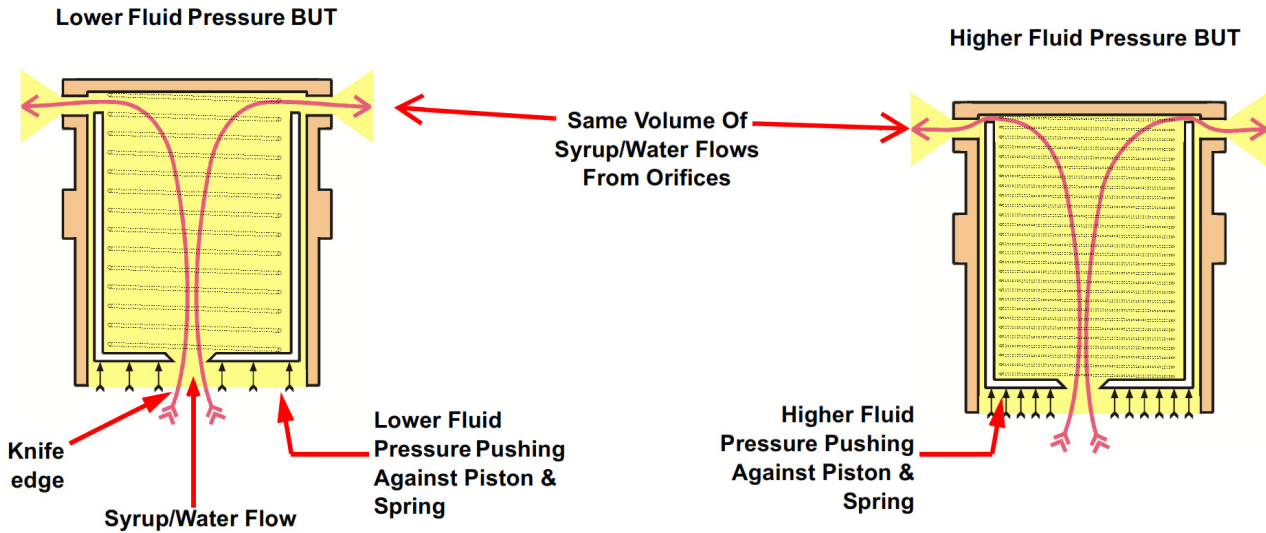


Figure 7

The position of the piston inside the sleeve is determined by the upward pressure of the liquid against the base of the piston and the downward pressure of the spring inside the piston (not shown here). The pressure of the spring is regulated by the adjusting screw.

If the pressure of the liquid increases, the flow rate through the knife-edged orifice will increase. The piston is moved upward closing off more of the outlet orifices. The same flow rate is thereby maintained.

1.3 Adjusting Flow Rates

Flow rates of the water and syrup are adjusted based on the desired ratio. For example: if the desired ratio is 5:1, then the flow rate of the water is 5 times that of the syrup. If the desired finished drink total flow rate is 3.0 ounces per second, then the water flow rate is 2.5 oz./sec and the syrup flow rate is 0.5 oz./sec. (The water at 2.5 oz./sec is five times the 0.5 oz./sec syrup flow rate.)

Note: Always adjust water within its range.

1.4 Calculating Flow Rates

Water Flow Rates At Selected Ratios				
Water To Syrup Ratio	Water at 1.5 oz./sec. Total Flow	Water at 3.0 oz./sec. Total Flow	Water at 3.75 oz./sec. Total Flow	Water at 4.5 oz./sec. Total Flow
2 to 1	1.00 oz./sec.	2.00 oz./sec.	2.50 oz./sec.	3.00 oz./sec.
3 to 1	1.13 oz./sec.	2.25 oz./sec.	2.81 oz./sec.	3.38 oz./sec.
4 to 1	1.20 oz./sec.	2.40 oz./sec.	3.00 oz./sec.	3.60 oz./sec.
5 to 1	1.25 oz./sec.	2.50 oz./sec.	3.13 oz./sec.	3.75 oz./sec.
6 to 1	1.29 oz./sec.	2.57 oz./sec.	3.21 oz./sec.	3.86 oz./sec.
7 to 1	1.31 oz./sec.	2.63 oz./sec.	3.28 oz./sec.	3.94 oz./sec.

Figure 8

The most frequent ratio is 5:1. The charts above list the breakdown for many ratios and flow rates. It is useful to be able to calculate flow rates when a chart is not available.

An example of calculating the water and syrup flow rates given the finished drink flow rate and the water to syrup ratio:

Given:

1. Finished Drink Flow Rate = 3.0 oz./sec.
2. Water to Syrup Ratio = 5 to 1

To calculate Water Flow Rate:

1. Calculate the Total Portions = Water Portion + Syrup Portion (example 5 + 1 = 6)
2. Calculate Syrup Flow Rate = Finished Drink Flow Rate ÷ Total Portions (examp. 3.0 oz./sec ÷ 6 = 0.5 oz./sec)
3. Calculate Water Flow Rate = Finished Drink Flow Rate – Syrup Flow Rate (example 3.0 oz./sec - 0.5 oz./sec = 2.5 oz./sec)

Prove the calculation is correct by adding water flow rate of 2.5 oz./sec + syrup flow rate of 0.5 oz./sec = finished drink flow rate of 3.0 oz./sec.

Water flowing at 2.5 oz./sec and syrup flowing at 0.5 oz./sec achieves a ratio of 5:1 and 3.0 oz./sec. flow rate.

2. Syrup/Concentrate

Syrup should always be pre-cooled before setting the ratio. Syrup takes a path through the valve parallel to the water path. It is introduced in the block, travels through a syrup flow control, banjo, valve head and out the nozzle. Note, concentrate is not cooled.

High sugar syrups are more viscous (thicker) than diet syrups and consequently have more pressure drop within a system. This pressure drop results in less flow at the valve and therefore a slower fill time. Increasing the pump pressure will help overcome the pressure drop caused by high sugar syrups.

3. Setting Ratios

If the ratio varies and must be adjusted often, it is probably the result of a restricted syrup system. It is then time to clean and sanitize the syrup tubing and cooling coils and check for other problems such as syrup pumps, etc.

Note: Try raising the pressure on the pump before cleaning.

Set the water flow rate first, then adjust the syrup to the desired ratio. This gives the most accurate valve flow setting possible. Measure the ratio and adjust the syrup flow, if necessary. This will result in uniform flow, better carbonation retention, and improved drink quality.

When using a ratio cup always take these precautions to ensure accuracy:

- After installing the separator tube, open the valve to fill the syrup tube before starting the ratio test.
- Clean the cup thoroughly between tests so there is no carry-over from one test to the next.
- Fill the cup to approximately 3/4 full and use approximately the same quantity for each test to ensure accurate settings.
- Take another sample to verify the settings.

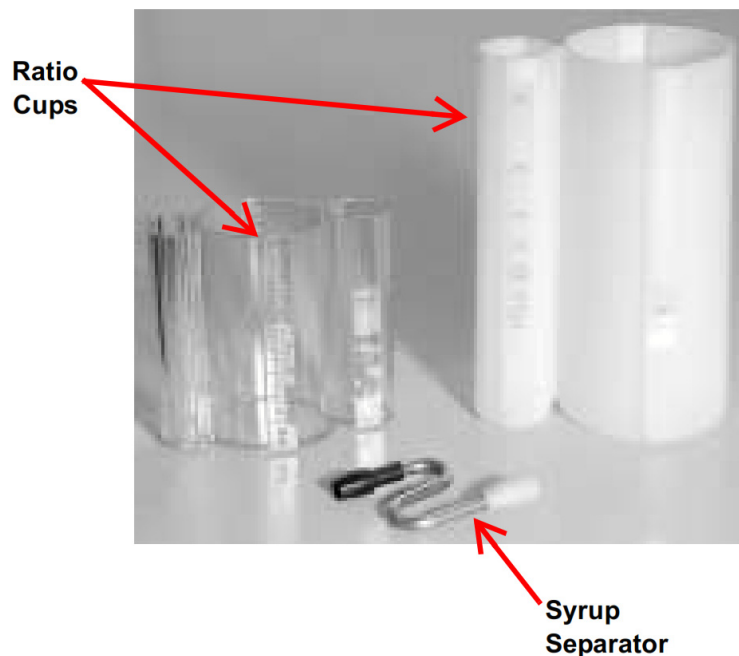


Figure 9

4. Mechanical

4.1 UF-1 and UFB-1 Valve Disassembly

1. Sequence for disassembly (refer to UF-1 Post-mix Dispensing Valve Illustrated Parts List) is as follows:



Figure 10

2. Remove front cover by lifting.



Figure 11

3. Remove valve cover.



Figure 12

4. Unplug wiring harness.

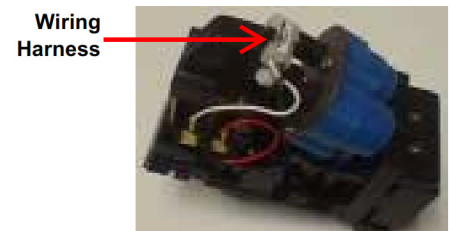


Figure 13

4.1 UF-1 and UFB-1 Valve Disassembly (cont.)

5. Remove valve from mounting block by pushing locking tab to left and push down on top plate of block.

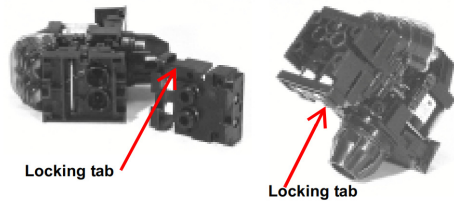


Figure 14

6. Remove water screw and lever (if it is installed on the valve).

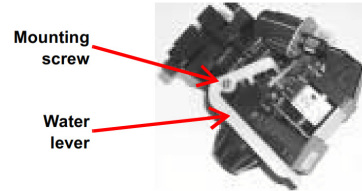


Figure 15

7. Remove nozzle – turn left ¼ turn.



Figure 16

8. Remove diffuser assembly.

Note: The diffuser must be cleaned daily. Do not use bleach, do not use detergent, do not put in dishwasher. Use lukewarm water or soak in carbonated water.




Figure 17

9. Remove bottom plate by disengaging side tabs.




Figure 18

10. Remove U-shaped retainer wire from back of valve.




Figure 19

4.1 UF-1 and UFB-1 Valve Disassembly (cont.)

11. Grasp flow control module assembly and pull up.

Note: O-rings on bottom of inlets and outlets.



Figure 20

12. Note that the flow rate (1 ½ - 3, 3 – 4 ½ or 1 ½ - 3 juice) and date code are printed on the retainer plate.



Figure 21

13. To disassemble the flow control:

Remove screws and pull retainer forward. Remove top flow control subassemblies exposing flow controls. Note the difference between high flow and ultra flow valves.

Note: Top Flow control is an assembly and cannot be disassembled.



Figure 22

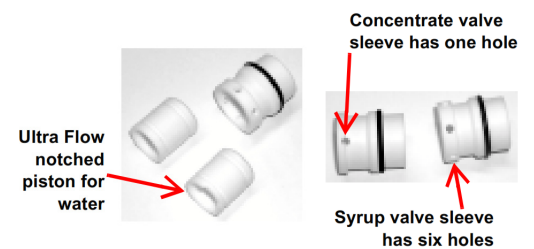


Figure 23

14. Pop off solenoid cover. Remove solenoid assembly from valve body by prying with screwdriver.

Note: Check plunger for corrosion and dirt – replace as necessary.

15. Carefully remove banjo lever springs.

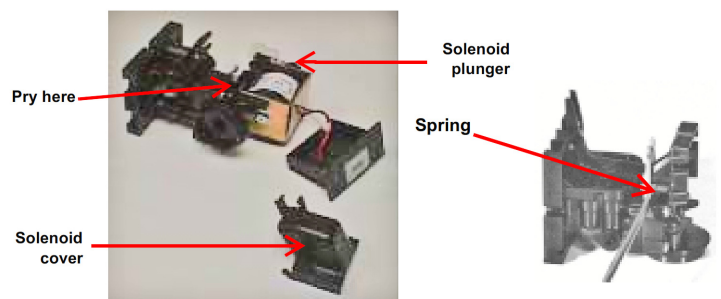


Figure 24

4.1 UF-1 and UFB-1 Valve Disassembly (cont.)

16. Then remove 5 screws that secure the valve head to the valve body.

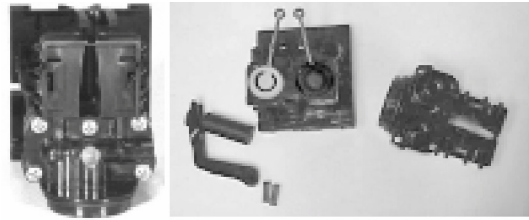


Figure 25

17. To remove the dispensing lever return spring pry the end of the spring and pull up. This spring stops the lever from vibrating.

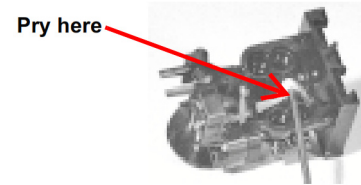


Figure 26

4.2 Mounting Block Disassembly

To disassemble mounting block:

1. Turn off water and syrup supplies.

2. Remove 2 screws from top plate and pull spools out from the bottom of the mounting plate exposing spools and O-rings.

Note: When replacing mounting block use replacement O-rings for the inlet fittings.

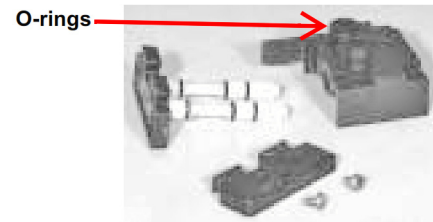


Figure 27

3. When installing a new block, make sure it is locked in the open position.

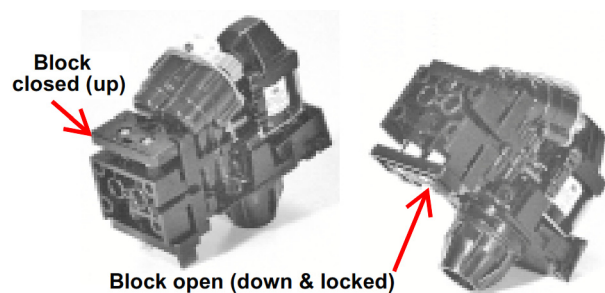


Figure 28

5. Controls and Electrical

All UF-1 and UFB-1 valves have a 24 volt solenoid that should be powered by an 80 kVA rated transformer. Voltage at the coil with the solenoid energized should be 22 and 27 VAC.

5.1 UF-1 and UFB-1 Portion Control Valve

The UF-1 and UFB-1 Portion Control Valves are push and release that dispense for a programmed duration. There are four settings: small, medium, large, and extra-large. There is also a Cancel/Pour rectangular button with red and green arrows. If this button is pressed during dispensing, the flow stops. If the valve is not dispensing and the button is pressed, the valve dispenses as long as the button is held. The portion controls are factory programmed to the following default settings:




Figure 29

Portion Size	Pour Time
S	2 sec.
M	3 sec.
L	4 sec.
XL	6 sec.

Portion Control Valve Programming

To set the amount of beverage dispensed, follow this procedure:

1. Press the hidden program switch until the PGM light turns on. (This light shows only when the programming mode is turned on.)
2. Put desired amount of ice in cup. Press and hold a portion button until the desired level in the appropriate sized cup is reached. Release the button.
3. Continue with other portion buttons that need programming. Portion buttons may be reprogrammed as many times as necessary. Only the last time values entered for each button will be saved when exiting the programming mode.
4. Press the program switch until the PGM light turns off.

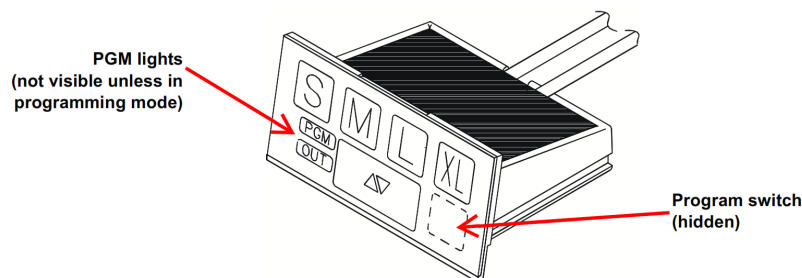


Figure 30

NOTE: The portion control valve does not have a top-off function.

NOTE: When in programming mode, press and release any of the portion size buttons to return to the factory portion settings.

NOTE: Portion controls will not operate below 22 volts. This is known as the “brown-out feature.”


5.2 UF-1 and UFB-1 Optifill™

The Optifill™ Valve is activated by pressing a cup against the dispensing lever. The valve dispenses only until foam from the cup touches the lever.* If a top-off delay is set, the valve will dispense again after a preset delay. This “topping-off” fills the cup after the foam settles. The top-off delay is can be adjusted from 0 to 15 seconds, the factory default is 2 seconds.

***Note:** A metal rivet in the valve body supplies electricity through the beverage being dispensed. When the foaming beverage comes in contact with the metal dispensing lever it completes the electrical circuit and the flow module closes the dispensing valve — even though the lever is still activated.

Note: The cup must stay in place against the lever for the top-off to operate.

Note: A slanted cup rest must be used with an Optifill™ valve.

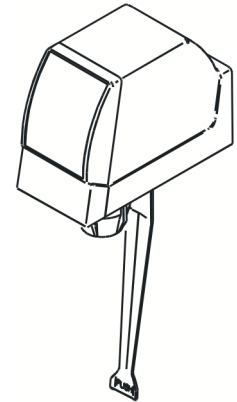

Optifill Valve Programming

The Optifill™ valve module provides a timed dispensing function to set water flow rates. To access this function:

1. Press the program switch until the LED turns on.
2. Hold a graduated cup under the valve nozzle without touching the lever. Press the large rectangular switch. The valve dispenses for 2 seconds. The dispensed liquid divided by 2 equals the oz./sec dispensed rate.
3. Press the program switch to exit the program.
4. To program the top off function follow this procedure:
5. Remove the front valve cover.
6. Press the program switch until the LED turns on (can be seen from the top of the module.)
7. Place cup against the lever for initial dispensing. When the foam touches the lever the valve stops and the LED flashes.
8. When the foam in the cup has lowered, press and release the large rectangular button. The valve dispenses a top-off and shuts off when the foam again touches the lever. The LED is now on steady.
9. Press the program switch until the LED turns off.
10. If you wish to disable the top-off, follow steps 1 through 3. Remove the cup from the lever. This will enter a zero value for the delay time and disable the top-off fill. Press the program switch for 3 seconds.

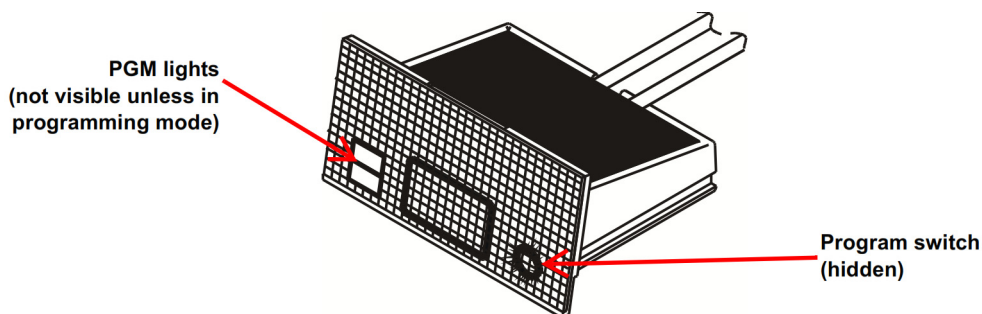


Figure 31

Note: The Optifill™ valve does not have an adjustment for sensitivity.

INSTALLATION



CAUTION: Only trained and certified technicians should service this unit. ALL WIRING AND PLUMBING MUST CONFORM TO NATIONAL AND LOCAL CODES.

1. Installation Requirements

1.1 Requirements Summary

The beverage dispenser that the UF-1 or UFB-1 valve(s) will be installed on should be capable of supplying an adequate flow of water (for the beverage and for cooling) and syrup.

Environment: indoor installation only

Temperature: 50 to 110° F ambient temperature

Syrup BIB: 60 to 80 psi

Carbonated water: 65 to 110 psi

Plain water: 50 to 110 psi

Electrical: 24 volts AC (22-27 volts), 80 VA, 50/60 Hz

1.2 Electrical Requirements

Before connecting electrical power to the beverage dispenser refer to nameplate to see if it requires 50 or 60 Hz power.



DANGER: To avoid possible serious injury or death the ELCB (earth leakage circuit breaker) must be installed in the electrical circuit of all 50 Hz units.



WARNING: To avoid possible electrical shock the unit must be electrically grounded using the green grounding screw provided inside the electrical contractor box.



CAUTION: The wiring must be properly grounded and connected through a 15-amp disconnect switch (slow blow fuse or equivalent HACR circuit breaker). ALL WIRING MUST CONFORM TO NATIONAL AND LOCAL CODES. MAKE SURE UNIT IS PROPERLY GROUNDED.

2. Installation and Startup

2.1 UF-1 and UFB-1 Valve Installation Procedure

1. Shut off syrup, unplug carbonator, shut off CO₂ and water supply to the unit.
2. Release pressure in lines by activating valves and lifting relief valve of carbonator.
3. Detach current valves:
 - Remove front cover by lifting.
 - Remove valve cover.
 - Unplug wiring harness.
 - Remove valve.

3. Installation Checklist

1. Voltage and proper grounding.
2. Valve properly secured (latched) to block.
3. CO₂ pressure to carbonator.
4. Water flow rate.
5. Syrup delivery pressure.
6. Finished product temperature less than 40°F.
7. Water to syrup ratio.
8. Portion size / top-off.
9. Water, syrup, CO₂ leaks.
10. Cover secured to valve.
11. Valves flavor correctly marked.

4. Retrofitting

UF-1 and UFB-1 valves will retrofit any valve with an identical mounting block screw pattern.

Note: Replacement of mounting block inlet fitting O-rings (part # 4073) is required when retrofitting valves.

4.1 Mounting Block Removal

To remove valve mounting block from the front panel, take out and save 4 screws.

IMPORTANT: Before installing block replace O-rings on each outlet fitting. Lubricate with Dow 111 or equivalent silicone lubricant. Do not use petroleum jelly.

SERVICE



CAUTION: Only trained and certified technicians should service this unit.
ALL WIRING AND PLUMBING MUST CONFORM TO NATIONAL AND LOCAL CODES.

1. Preventative Maintenance

1.1 Preventative Maintenance Procedures

Procedure	Interval (Months)
Check valve operation (does it dispense properly)	6
Replace worn or missing parts	6
Clean valves	6
Check voltage (22 to 27 VAC with the valve activated)	6
Check product temperature (less than 40°F)	6
Check water flow rate (use syrup bypass tube and ratio cup)	6
Check ratio	6
Check portion size / top-off	6
Check for leaks	6

NOTE: Perform these procedures every six months OR after a service call.

1.2 Cleaning Valve

1. Prepare sanitizer solution in a clean container and fill up a clean spray bottle.
2. Remove the valve nozzles and diffusers. Place them in sanitizer solution. Allow a soaking if needed.
3. Clean them using the valve brush and then soak them again in the sanitizer solution for a minimum of 2 minutes. (Do not use a wire brush)
4. Spray the sanitizing solution upwards into the underside of valve as shown at right, ensuring that all surfaces are wetted. Clean the region using the valve brush. Do not use a wire brush.
5. Spray the sanitizer solution to the underside of the valves again. Allow valves to air dry.
6. Wipe the valve levers using a sanitizer-soaked towel.
7. Wash hands and reinstall the cleaned and sanitized nozzles and diffusers onto the valves.



Figure 32



CAUTION: Do not soak valve components in chlorine (bleach).

TROUBLESHOOTING

Excess Foam

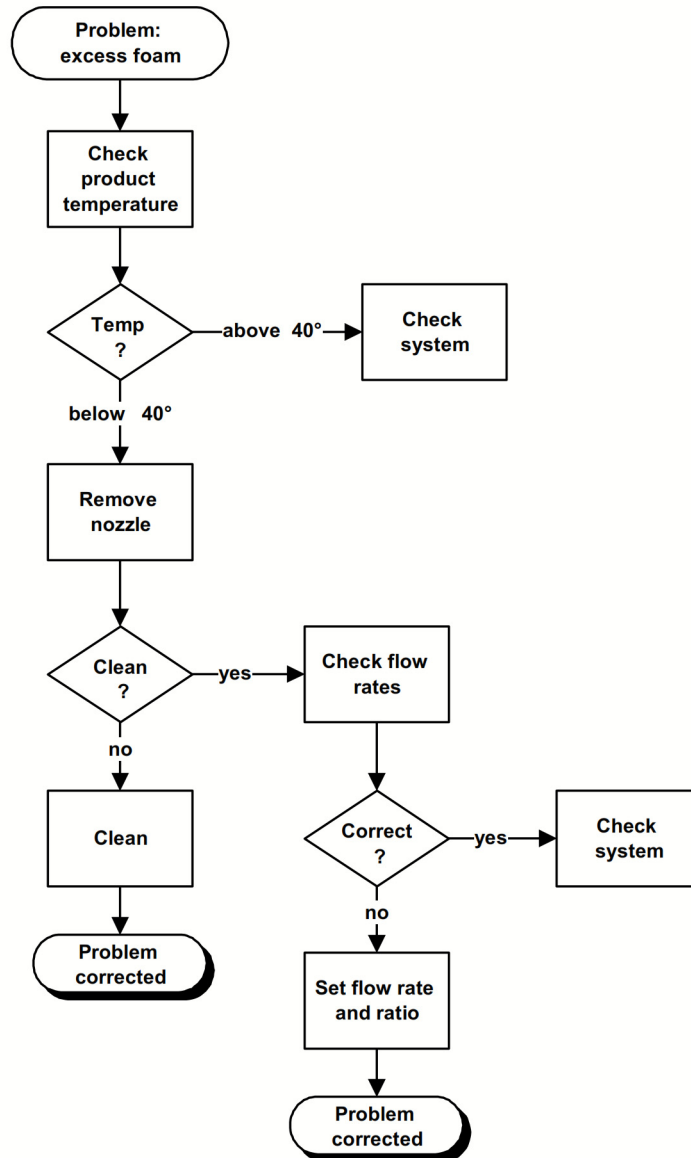


Figure 33

TROUBLESHOOTING

Off Taste

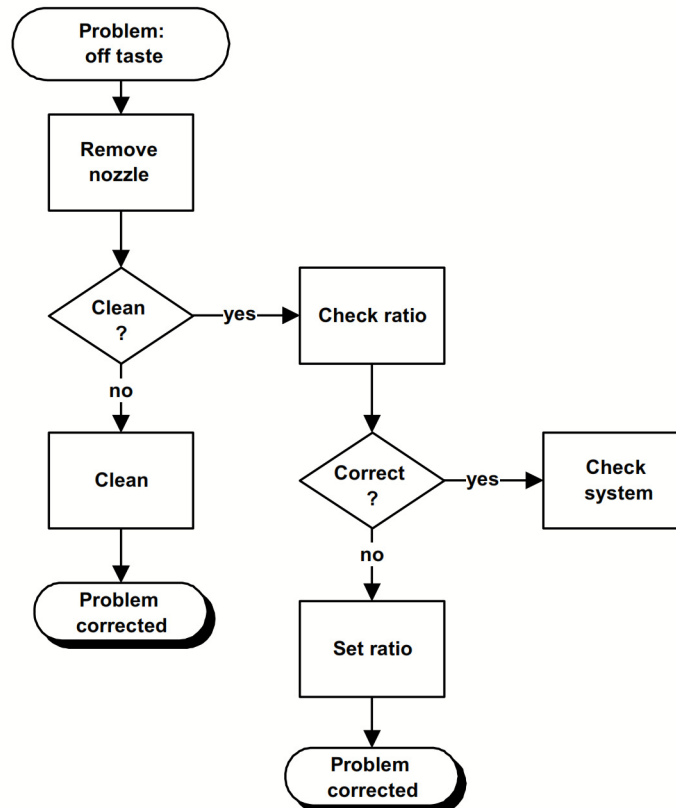


Figure 34

TROUBLESHOOTING

Valve Stuck Open

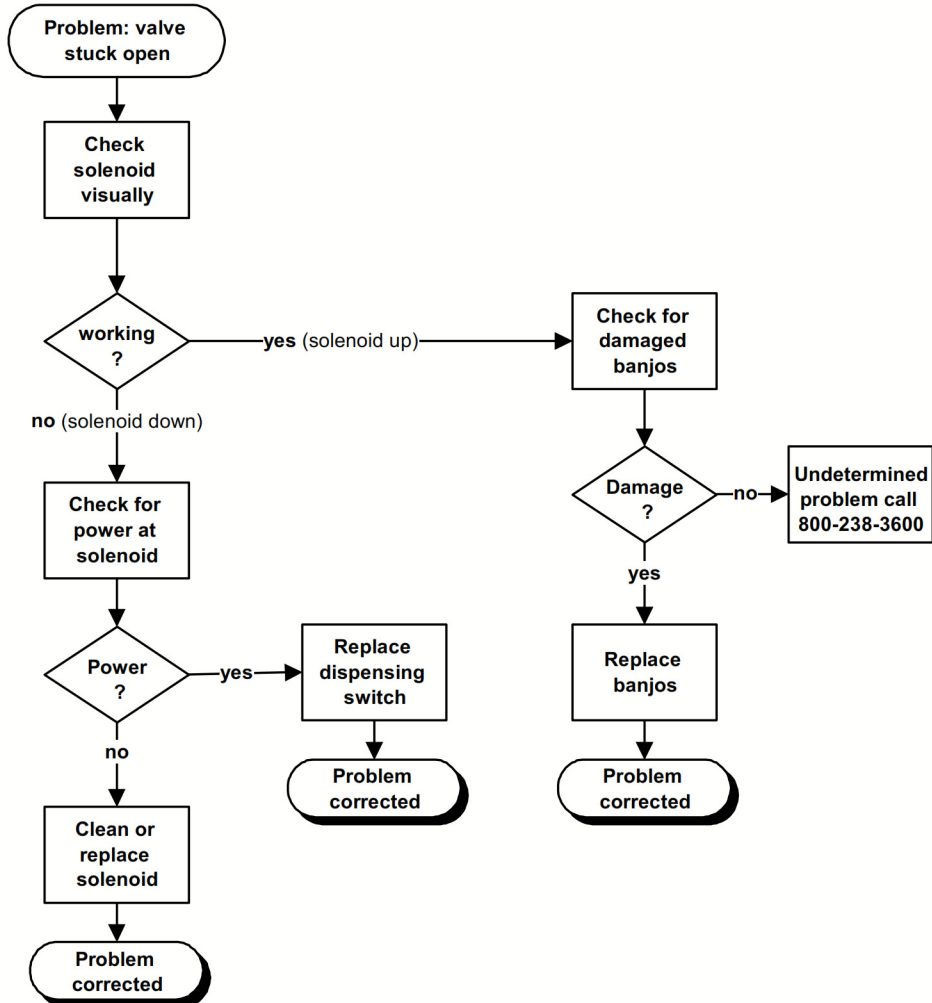


Figure 35

TROUBLESHOOTING

No Product

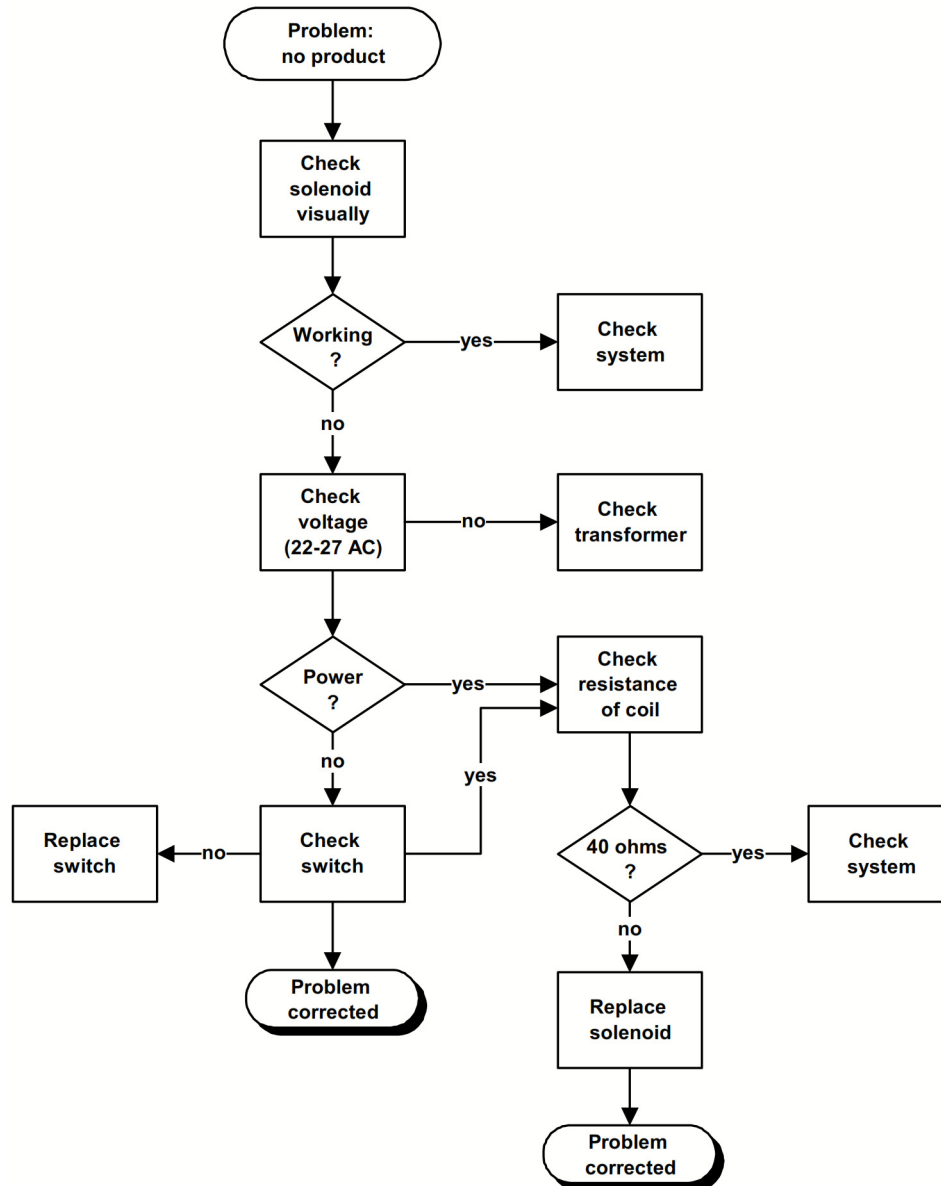


Figure 36

ATTACHMENTS

The following attachments should be included with this lesson:

UF-1 Post-Mix Dispensing Valve Illustrated Parts List




Figure 37

Post Mix Valves Critical Grounding Information Service Bulletin

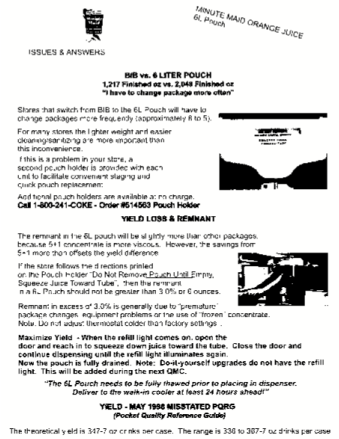


Figure 38



REVIEW

DATE: _____

NAME: _____

LOCATION: _____

The following questions summarize important points in the training lesson on UF-1 and UFB-1 Valves and the UF-1 and UFB-1 Product Manual.

1. What component(s) differ between High Flow and Ultra Flow valves?
(circle the correct answer)

- A. Sleeve
- B. Piston
- C. Spring
- D. All of the above.

2. What two things determine the position of the flow control piston inside the sleeve?
(circle the correct answer)

- A. Flowing pressure and spring pressure
- B. Syrup and water pressure
- C. Temperature and pressure
- D. Syrup and water flow.

3. How might chloramine affect a dispensing valve?
(circle the correct answer)

- A. Restriction in the flow controls
- B. Color of the valve body
- C. Cracking of the flow control
- D. Degradation of rubber components.

4. If a ratio setting changes, what should you check for?
(circle the correct answer)

- A. Syrup pressure
- B. Water pressure
- C. Line restriction
- D. All of the above.

5. Which flow rate should be set first?
(circle the correct answer)

- A. Syrup
- B. Water
- C. Either syrup or water
- D. Both at the same time.

REVIEW

6. What functions does the Cancel/Pour Button on the Portion Control Valve perform?
(circle the two correct answers)
- A. Cancel portion
 - B. Manual portion
 - C. Reset default
 - D. All of the above.
7. UF-1 valves control?
(circle the correct answer)
- A. On-Off of syrup and water
 - B. Flow rates of syrup and water
 - C. Mixing of syrup and water
 - D. All of the above.
8. When replacing the UF-1 valve mounting block you must?
(circle the correct answer)
- A. Drill new holes
 - B. Replace the wiring harness
 - C. Replace the inlet fitting
 - D. Replace the inlet fitting O-rings.
9. If the finished drink flow rate is 4.0 oz./sec. and the desired ratio is 7 to 1. What should the water flow rate be?
(circle the correct answer)
- A. 3.0
 - B. 3.5
 - C. 4.0
 - D. 2.5
10. What is the function of the notch in the Ultra Flow water piston?
(circle the correct answer)
- A. Let dirt pass through
 - B. Prevent carbonation loss
 - C. Used in manufacturing process
 - D. Eliminates pulsing and smooths water flow.
11. Which of the following will cause the valve ratio to change?
(circle the correct answer)
- A. Flow control restrictions
 - B. Low CO pressure
 - C. Weak BIB pump
 - D. All of the above.

REVIEW

12. What two things are different between a concentrate diffuser and a syrup diffuser?
(circle the two correct answers)

- A. Color
- B. Position of the product outer holes
- C. Size
- D. Shape.

13. How can you identify a concentrate sleeve?
(circle the correct answer)

- A. Number of outlet holes
- B. Color
- C. Shape
- D. Size.

14. What is the flow rate range of a Fast Flow valve?
(circle the correct answer)

- A. 1.0 to 2.5 oz./sec.
- B. 1.5 to 3.0 oz./sec.
- C. 2.5 to 4.0 oz./sec.
- D. 3.0 to 4.5 oz./sec.

15. What is the flow rate range of a Ultra Flow valve?
(circle the correct answer)

- A. 1.0 to 2.5 oz./sec.
- B. 1.5 to 3.0 oz./sec.
- C. 2.5 to 4.0 oz./sec.
- D. 3.0 to 4.5 oz./sec.

16. What is the range of a concentrate valve?
(circle the correct answer)

- A. 1.0 to 2.5 oz./sec.
- B. 1.5 to 3.0 oz./sec.
- C. 2.5 to 4.0 oz./sec.
- D. 3.0 to 4.5 oz./sec.

17. What are the three basic steps to set the ratio on a valve?
(circle the three correct answers)

- A. Adjust syrup ratio
- B. Set water flow rate
- C. Set portion size
- D. Cool product.

REVIEW

18. How can you identify the valve flow rate?
(circle the correct answer)

- A. Decal on inside of cover
- B. Printed on valve body
- C. Color of valve
- D. Printed on flow control retainer.

19. What is the minimum VA transformer required for a valve?
(circle the correct answer)

- A. 40
- B. 60
- C. 80
- D. 100.

20. At what intervals (frequency) should maintenance procedures be performed?
(circle the two correct answers)

- A. Every 30 days
- B. Every 3 months
- C. Every 6 months
- D. After every service call.

Marmon Foodservice Technologies, Inc.
www.cornelius.com