




REMOTE AIR-COOLED CONDENSER

WCU-600



FEATURES

- Durable** – Weather-proof housing
- Efficient** – High-efficiency copper and aluminum condenser
- Environmentally responsible** – Saves energy
- Intuitive** – Eliminates heat and reduces noise from ice maker location
- Smart** – Reduces air conditioning requirements

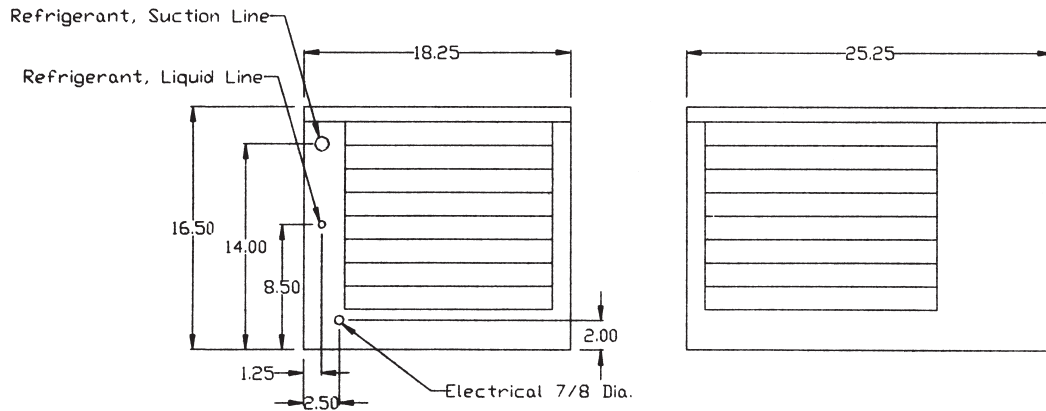

PART NUMBER	DESCRIPTION
638090690	Condenser Model WCU-600 (Use with cuber model WCC/WCF 700R, 710R and CI-3300)
638090691	Condenser Model WCU-601 (Use with cuber model WCC/WCF 710R, 711R and CI-3300)
632000002	Remote Condenser WCU-1401 (30.5 W x 30.5 D x 28.5 H) 285 lbs.
631700700	Remote Condenser WCU-2001R (28.5 W x 13.5 D x 26.5 H) 104 lbs

TECHNICAL SPECIFICATIONS

REFRIGERANT R-404a

CONDENSER FINISH Galvanized

REFRIGERANT LINE SPECS Vertical Drop:
20' (4.6 m) max
Vertical Lift:
20' (10.7 m) max

MAXIMUM LENGTH 55' (16.8 m)

TUBE SIZE 0.5" OD (1.27 cm) +
0.25" OD (0.63 cm)

REMOTE TUBING
KITS OPTIONAL 20' (6.1 m)
35' (10.7 m)
55' (16.7 m)

ELECTRICAL RATING 208 or 230 V / 60 Hz /
2 Amps
115 V / 60 Hz / 2 Amps
220 V / 50 Hz / 2 Amps
(single phase)

CIRCUIT CAPACITY 20 A

MAXIMUM FUSE SIZE 25 A (HVac Circuit
Breaker Required)

AGENCY LISTINGS 