

# INSTALLATION INSTRUCTIONS

## FCB Pinnacle 2 Flavor Units

### SAFETY INSTRUCTIONS

 **WARNING:**

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

**Failure to comply could result in serious injury, death or damage to the equipment.**

### QUALIFIED SERVICE PERSONNEL

 **WARNING:**

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

**All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.**

### SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

 **WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

**Failure to comply could result in serious injury, death or damage to the equipment.**

 **CAUTION:**

Always be sure to keep area around the unit clean and free of clutter.

**Failure to keep this area clean may result in injury of equipment damage.**

# INSTALLATION INSTRUCTIONS

## Sound Kit Installation Procedure



Figure 1.

### Materials Included

1. 2 each short covers (P/N 620053463)
2. 2 each long covers (P/N 620053464)
3. 1 each air filter (P/N 620608613)

### Installation Instructions

1. Remove top cover and side panels.
2. Place side panels flat with inside of the cover facing up. Lay 2 long and 2 short covers face up, as shown, with red tape up.


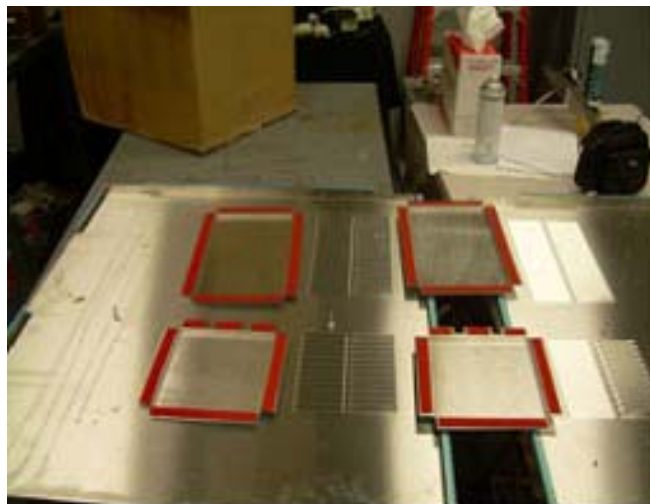


Figure 2.


- Carefully remove red seal cover from short cover. Turn the cover over and carefully place it on the short louvered section, as shown.

**NOTE: Placing the cover and marking the centered location before removing the red seal materials is the ideal method for placing the covers correctly.**

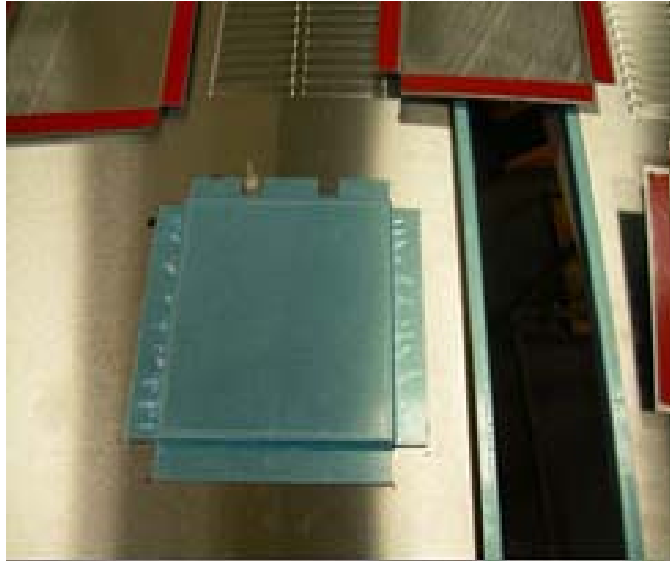

**Figure 3.**

- Repeat Step 3 for remaining 3 covers, as shown.

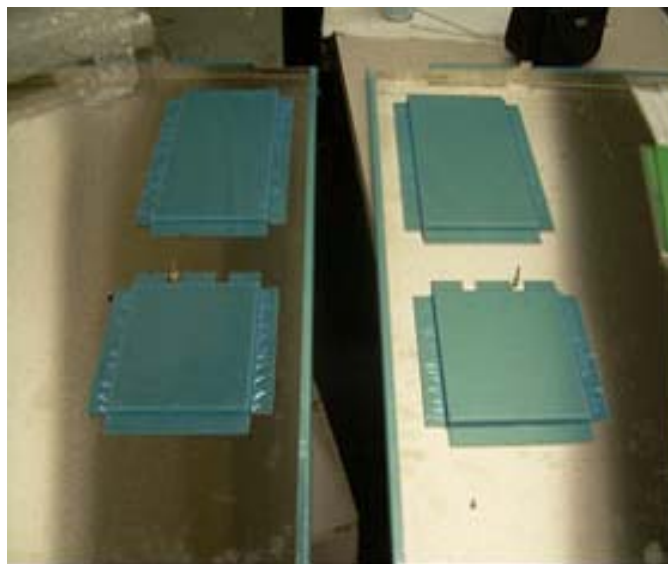

**Figure 4.**

- Hang side panels on unit. The panels must be flat against the side of frame. The bottom cover is a tight fit into the frame opening. Tighten panels with screws and re-install top cover.

**IMPORTANT: Blocking air-flow on both sides of units in this manner requires a minimum of 4" clearance on back of the unit for adequate airflow to the condenser. Failure to provide this clearance could result in compressor or condenser fan failure and voiding of the warranty.**

6. Locate condenser air filter on the back of the unit.



Figure 5.

7. Remove the condenser air filter and discard.

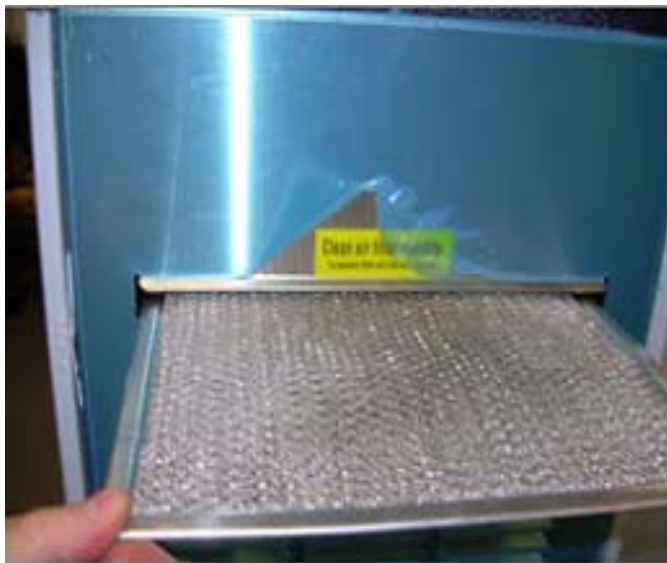


Figure 6.


8. Locate green replacement filter. Insert into frame.

**NOTE: The crossing steel re-enforcing bars are on the bottom of the filter.**



**Figure 7.**

9. Push the green filter into place, as shown.

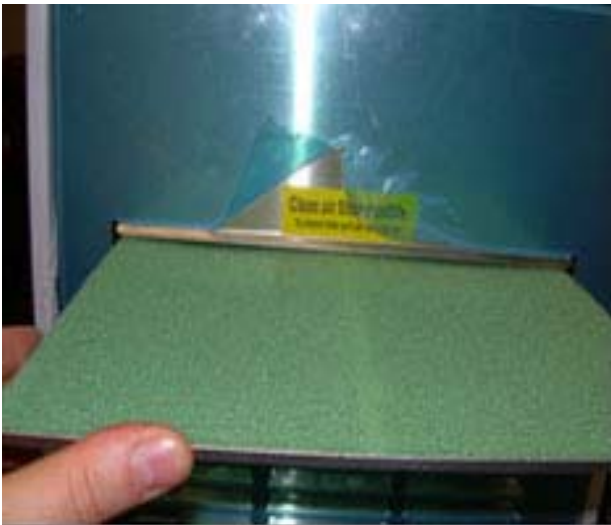

**Figure 8.**



**Figure 9.**

10. The unit is now ready for normal operation.