

OPERATOR'S MANUAL

IDC ICEMAKER ADAPTOR KIT FOR P/N 629097310

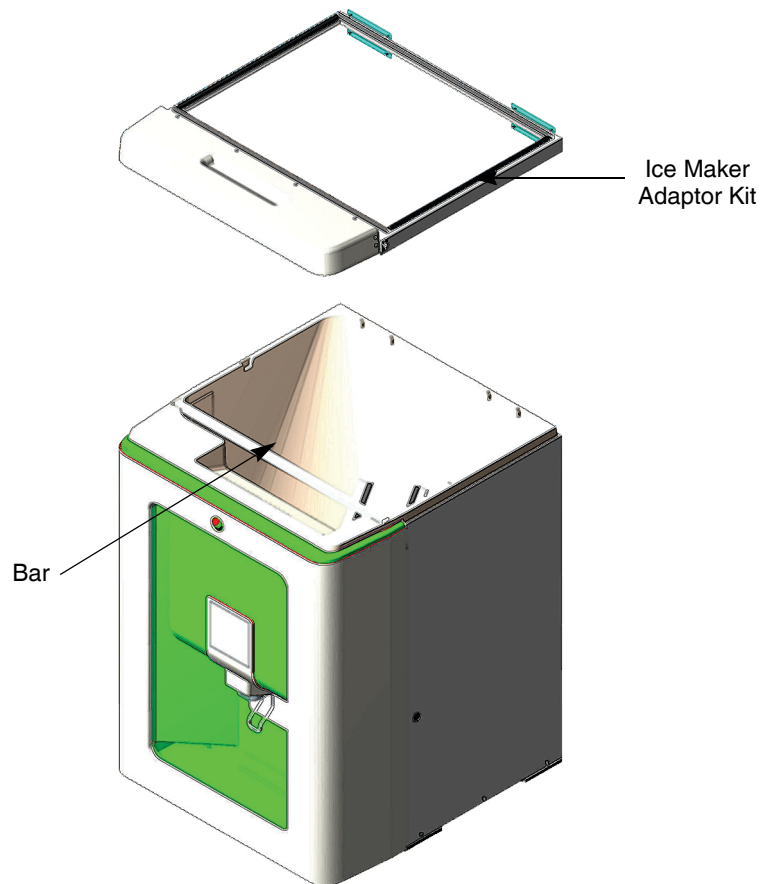


Figure 1.



WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

Instructions for removal and replacement of the icemaker adaptor lid for manual filling of ice in the hoppers and monthly hopper sanitizing.

Removal of Lid:

1. Remove the thumb screw at the left side of the lid bracket (Figure 2A).
2. Remove screw on the right side of the lid, if applicable (Figure 2B).
3. Lift lid up over the adapter flange and place on counter (Figure 2C). Perform task.



Figure 2A.



Figure 2B.



Figure 2C.

Replacement of Lid:

4. Replace lid ensuring that the back lip is retained by the flange of the adaptor frame (Figure 3A).
5. Align the lid bracket slot and adaptor cover to secure thumb screws (Figure 3B).
6. Align the lid flush with the merchandiser, then tighten both thumb screws (Figure 3C).

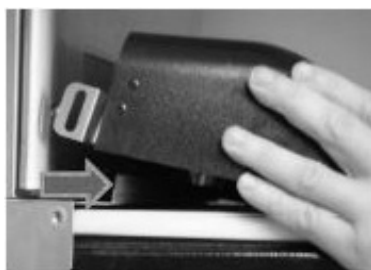


Figure 3A.



Figure 3B.



Figure 3C.

NOTE: Thumb screws must be replaced on the lid and tightened flush to the bracket.