

QUEST NEW DOOR GASKET & MAGNETIC LATCH

SAFETY INSTRUCTIONS



WARNING:

Before starting installation, read and understand all the safety labels and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL



WARNING:

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit. All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:



WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.



CAUTION:

Always be sure to keep the area around the unit clean and free of clutter.

Failure to keep this area clean may result in injury or equipment damage.


New Door Gasket & Latch Replacement Instructions

Supplied Parts		
P/N	Description	Qty
70171	SCREW MA 08-32 TRPH 12 SS	2
0700201	SCREW 6-32 X 1/4 BHMS	2
620061953	CATCH MAGNETIC SEALED 6.6	1
620074585	LATCH MAGNETIC MALE	1
620074847	SEAL DOOR QUEST 2FL (SUPPLIED IN KIT 629098080 ONLY)	1
620074848	SEAL DOOR QUEST 4FL (SUPPLIED IN KIT 629098081 ONLY)	1

Tools Needed

- #2 Phillips Head Screwdriver
- #1 Phillips Head Screwdriver


1. **Remove the Old Gasket** – Pull the existing door gasket straight out to remove it. Discard gasket
2. **Clean** – be sure gasket groove in door is clean before installing the new gasket

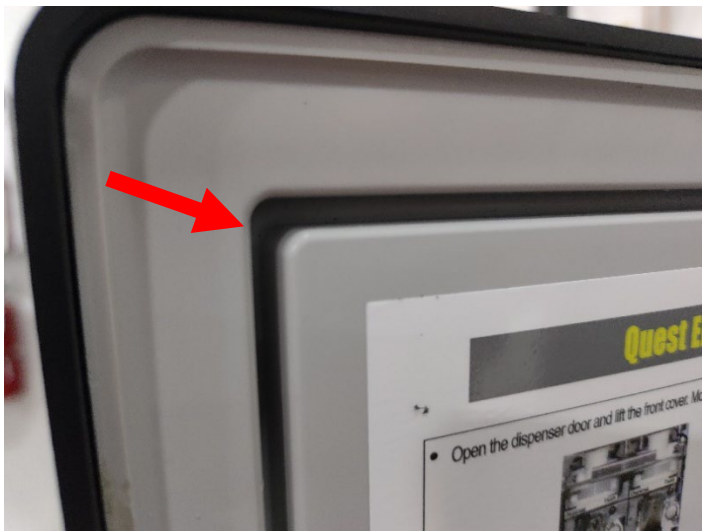

3. Install the New Gasket

Note: Clean potable water can be used to ‘lubricate’ the gasket barbed tab that inserts into the door groove to improve installation.

- Insert each corner into the groove first.
- Press the middle of each side into place.
- Finally, press the remaining sections between the middle and each corner.

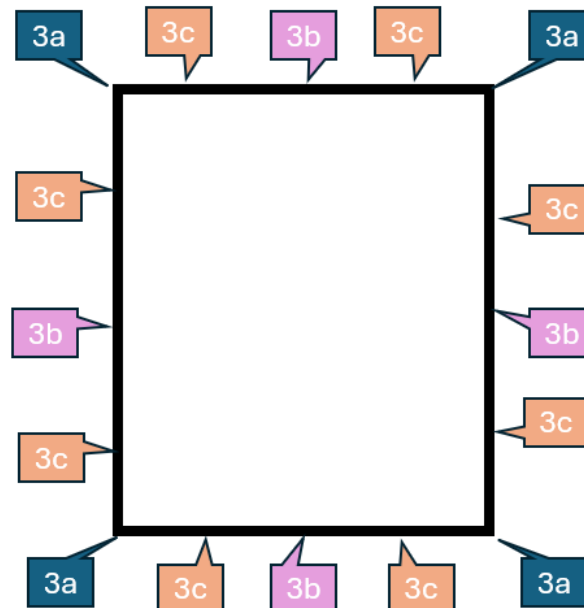

4. Replace the Door Latch

- Remove the two screws securing the door latch and discard both the screws and latch.



- b. Install the new door latch using the two screws provided in the kit. ***Do not overtighten screws***



5. Access the Door Catch

- a. Remove the top panel, rear panel, door catch protector plate, and side panel to access the door latch catch.



- b. Save all screws and protector plate for reinstallation.


6. Replace the Door Catch

- a. Remove the two screws securing the door catch and discard both the screws and catch. ***Do not discard the protector plate!***
- b. Install the new magnetic door catch using the two screws provided in the kit. ***Do not overtighten the screws!***





7. Verify Door Functionality

- a. Open and close the door, ensuring the new gasket fully seals around the cabinet.

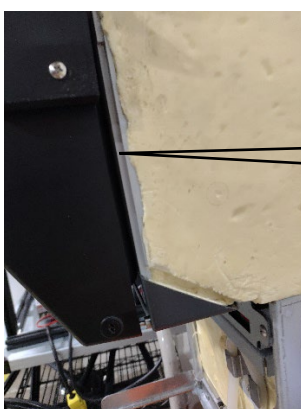

Make sure gasket seals all around

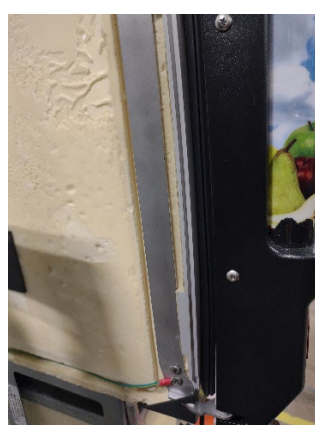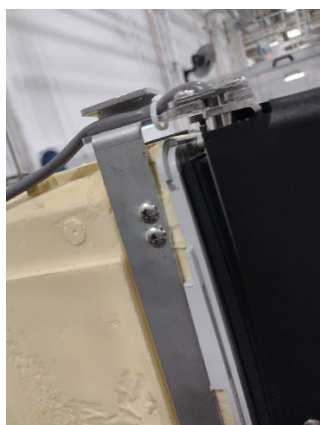


- b. Confirm the latch holds the door securely closed.



c. Adjust the door and/or latch if needed to improve sealing and alignment.

8. **Reinstall Panels** - After confirming proper alignment, reattach the side panel, latch protector plate, rear panel, and top panel.

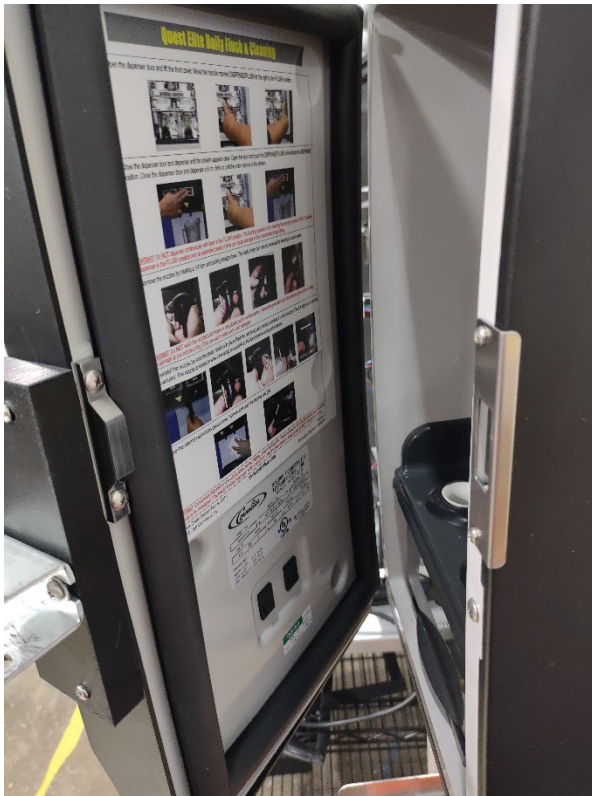

END