

ADAPTER LID FOR 255/215

Installation Instructions for Adapter Lid For 255/215

SAFETY OVERVIEW

- Read and follow **ALL SAFETY INSTRUCTIONS** in this manual and any warning/caution labels on the unit (decals, labels or laminated cards).
- Read and understand ALL applicable OSHA (Occupational Safety and Health Administration) safety regulations before operating this unit.

SAFETY ALERT SYMBOL



This is the safety alert symbol. When you see this in the manual or on the unit, be alert to the potential of personal injury or damage to the unit.

Types of Alerts

A DANGER:	Indicates an immediate hazardous situation which if not avoided WILL result in serious injury, death or equipment damage.
A WARNING:	Indicates a potentially hazardous situation which, if not avoided, COULD result in serious injury, death, or equipment damage.
A CAUTION:	Indicates a potentially hazardous situation which, if not avoided, MAY result in minor or moderate injury or equipment damage.

SAFETY TIPS

- Carefully read and follow all safety messages in this manual and safety signs on the unit.
- Keep safety signs in good condition and replace missing or damaged items.
- Learn how to operate the unit and how to use the controls.
- Do not let anyone operate the unit without proper training. This appliance is not intended for use by very young children or infirm persons without supervision. Young children should be supervised to ensure that they do not play with the appliance.
- Keep your unit in proper working condition and do not allow unauthorized modifications to the unit.

Revision: A



SAFETY INSTRUCTIONS



WARNING:

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL



WARNING:

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS



WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work. Failure to comply could result in serious injury, death or damage to the equipment.



CAUTION:

Always be sure to keep the area around the unit clean and free of clutter. Failure to keep this area clean may result in injury or equipment damage.



CAUTION:

Note the following: This unit is not designed for use in outdoor locations. The appliance must be placed in a horizontal position. The appliance is not suitable for installation in an area where a water jet would be used.



FUNCTION:

The lid functions as a manual fill lid normally and then can be cut to appropriate score and be an ice adapter.



CAUTION:

Before Installing the Lid, remove the existing cover if present, you will have two paths for the installation, with and without ice maker on top of the unit.



WARNING:
This Kit Is Used Only For 30" Icemaker

LID INSTALLATION (WITHOUT ICEMAKER)

Table 1: Lid Installation (Without Icemaker)

Step	Action	Figures
1.	Hold the cover with the lid folded on the back cover and facing down.	Figure 1.
2.	Position the front and the back of the lid, as shown.	Figure 2.
3.	Place the lid on top of the unit.	Figure 3.



Close the lid and cover the rest of the bin.



Figure 4.

LID INSTALLATION (WITH ICEMAKER)

Table 2: Lid Installation (With Icemaker)

Step	Action	Figures
1.	You will need to identify the ice maker brand and model number. Refer to the cut-off schematic, you will have to cut the lid according to the color line matching the ice maker spec.	Figure 5.
2.	Use a box knife or a hand tool, to cut the corresponding lines.	Figure 6.
3.	After cutting the lid, use your finger and a flat screw driver to remove the unwanted part of the lid.	Figure 7.



Remove the lid and clean any remaining part on the opening. Figure 8. Place the 28" bar from the kit in the front pocket as shown in Figure 9. Figure 9. For the 32" ice maker turn black tabs on bar down. Apply RTV on each end of the bar to fill gap between bar and hopper as shown in Figure 5. 10 Figure 10. For a 22" ice maker turn black tabs on bar and use (2) front to rear bars. Apply RTV on each end of the bar to fill gap between bar and hopper as shown in Figure 11. Figure 11. Add some RTV (Silicon), all around the exterior line, as shown. Place the cut lid on top of the ice bin. Figure 12.



CUT-OFF SCHEMATIC

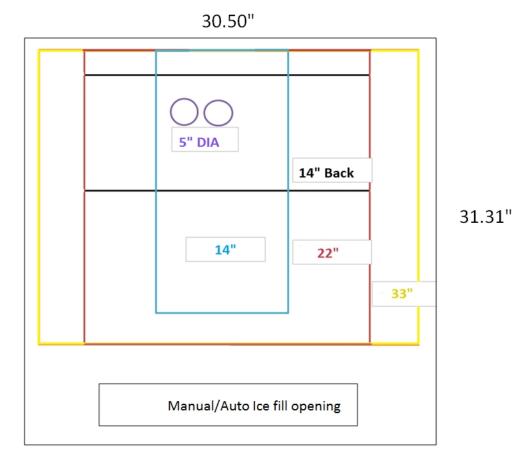


Figure 13